

## SUBWAY

### Integrated Bidet Toilet Bowl and Seat Top, White

Model # 5911CS01


#### Product Features

- Sleek tankless toilet with integrated full-featured bidet seat top
- Compact-elongated bowl with Rimless flush and skirted trapway
- High-efficiency 1.28gpf siphonic flush
- 12" rough-in
- Instant water heating system
- Foot sensor-activated auto-flush with back-up manual flush
- Self-cleaning, adjustable nozzle
- Rear and front bidet nozzle with oscillating option
- One-touch wash-flush-dryer cycle
- E-Foam protective bowl layer for added odor prevention and hygiene
- UV nozzle sterilization
- Auto-open and -close seat lid
- Adjustable water temperature and pressure
- Heated seat and warm air dryer with adjustable temperature
- Built-in deodorizer and LED nightlight
- Side-dial operation for select functions
- Wall-mounted remote included
- Limited lifetime warranty on ceramic
- 1-year warranty on electronic seat top



## SPECIFICATIONS

<b>Rated Voltage</b>	120V	
<b>Rated Frequency</b>	60 Hz	
<b>Rated Power</b>	1100W (57-61F inlet water temp.)	
<b>Water Supply Mode</b>	Direct connection to water supply	
<b>Water Pressure Range</b>	50PSI-116PSI	
<b>Water Flow</b>	>7.92 gal/min	
<b>Safety Device</b>	Seated sensor, electrical leakage protector, water over-pressure protection device	
<b>Spray Settings</b>	<b>Spray Volume</b>	About 0.13 - 0.21 gal/min
	<b>Warm Water Temperature</b>	4 levels Room temp to 104F (40C)
	<b>Heating Method</b>	Ceramic instant heating
	<b>Heater Capacity</b>	1100W
	<b>Safety Device</b>	Temperature sensor, temperature fuse, temperature jumper, flow meter
<b>Heated Seat</b>	<b>Seat Temperature</b>	4 levels Room temp to 104F (40C)
	<b>Seat Heater Capacity</b>	45W
	<b>Safety Device</b>	Temperature sensor, temperature fuse
<b>Dryer</b>	<b>Temperature Adjustment</b>	4 levels Room temp to 104F (40C)
	<b>Heater Capacity</b>	200W
	<b>Safety Device</b>	Double-sheet metal switch, temperature fuse, temperature sensor
<b>Ambient Temperature Range</b>	37.4° - 104°F (3° - 40°C)	
<b>Water Supply Temperature Range</b>	37.4° - 95°F (3° - 35°C)	
<b>Deodorizer</b>	Activated carbon, 1.5W	

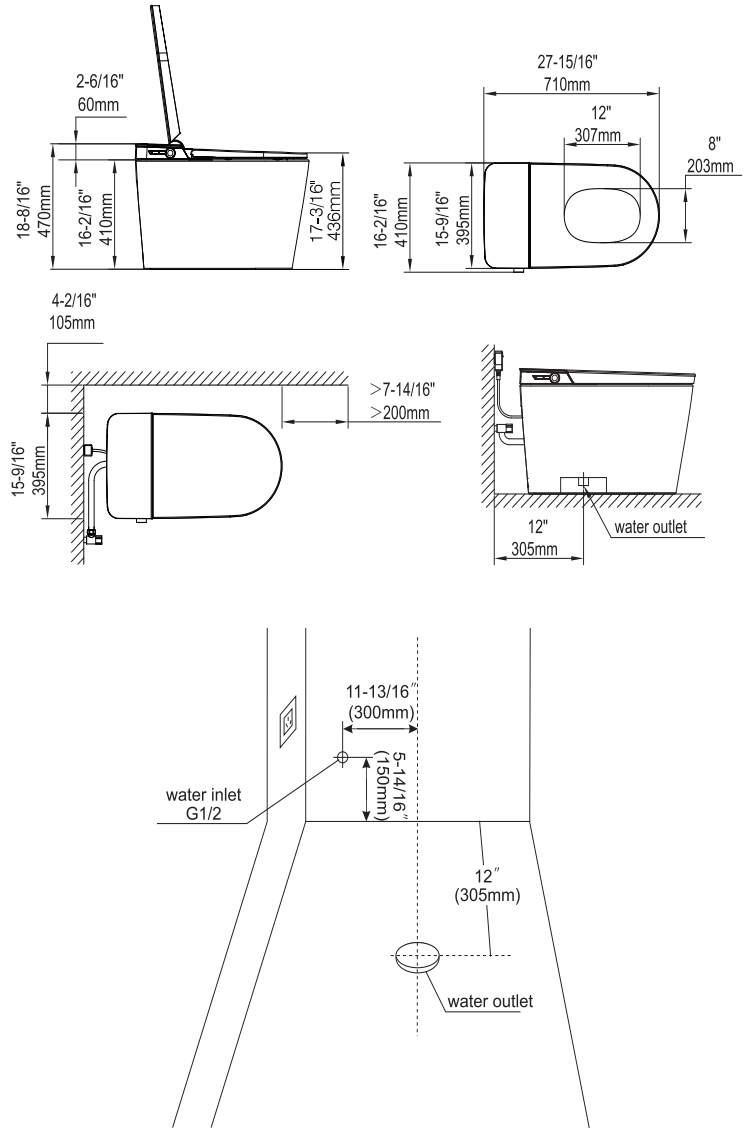

**IMPORTANT:** Dimensions are nominal and may vary within the range of tolerance per NSI Standard A112.19.2. These measurements are subject to change. No responsibility is assumed for use of superseded or voided pages.

For use with potable water only. Do not use with recycled water.

This product is for use on a nominal 120V circuit and a GFCI (ground-fault circuit interrupter) receptacle is required for use. Please consult a qualified electrician.

**Codes/Standards:**

- Meets or exceeds ASME A112.19.2, ASME A112.4.2/CSA B45.16-2021, UL 1431, CSA C22.2 #68, CSA C22.2 #64
- Certifications: IAPMO(cUPC), State of Mass, CEC
- Code compliance: cUPC, IPC, NPC Canada and others